Whirlpool Gold® GY399LXU

KEY FEATURES

- Meets ADA Push/Pull Force Guidelines
- Hidden Bake
- TimeSavor™ Plus Convection Cooking System
- Dual Radiant Elements
- Large Oven Capacity
- AccuBake® Temperature Management System

COLORS

White(Q) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Slide-In Electric Range Features & Specifications

	Whirlpool Gold®
Model No.	**GY399LXU**
Oven	
Convection	TimeSavor™ Plus
Temperature Management System	AccuBake®
Delay Bake	Yes
Capacity (cu. ft.)	4.5
Hidden Bake	Yes
Sabbath Mode	Yes
Cleaning System	Self-Clean
Auto Self-Clean Latch	Yes
Automatic Light	Yes
Light Switch	Touch-Pad
Adjustable Racks	2 Full-Width/ 1 Split
Rack Guides	5
Glass Door	Yes
Window	Extra Large
Cooktop	
Ceramic-Glass CleanTop®	Yes
Surface Elements	(2) 6", (1) 6/9", (1) 9/12" Radiant
Surface Unit Indicator Lights	Yes
General Information	
Storage Drawer	Yes
Approx. Shipping Weight (lbs.)	200

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Slide-In Electric Range Requirements

Do not pinch the power supply cord between the range and the wall.

Do not seal the range to the side cabinets.

25" countertop depth.

24" base cabinet depth.

36" countertop height.

Contact a qualified floor covering installer to check that the floor covering can withstand at least 200° F.

Use an insulated pad or ¼" plywood under range if installing range over carpeting.

Cabinet opening dimensions shown are for 25" (64 cm) countertop depth, 24" (61 cm) base cabinet depth and 36" (91.4 cm) countertop height.

If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

Product Dimensions

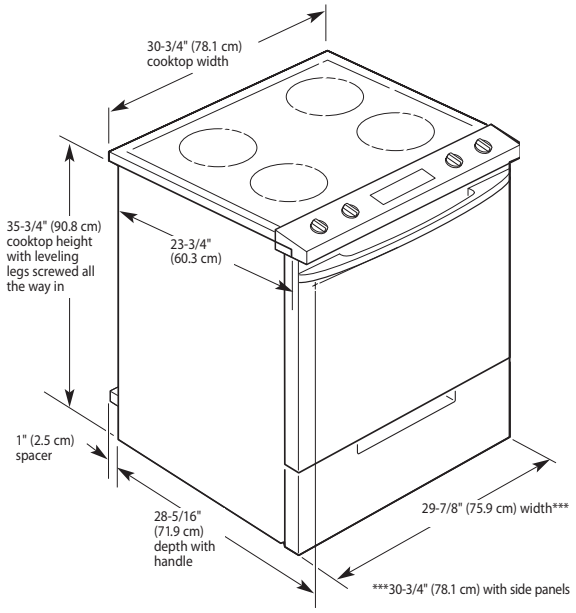
30-3/4" (78.1 cm) cooktop width
35-3/4" (90.8 cm) cooktop height with leveling legs screwed all the way in
23-3/4" (60.3 cm)
1" (2.5 cm) spacer
28-5/16" (71.9 cm) depth with handle
29-7/8" (75.9 cm) width***
***30-3/4" (78.1 cm) with side panels

Cabinet Opening Dimensions

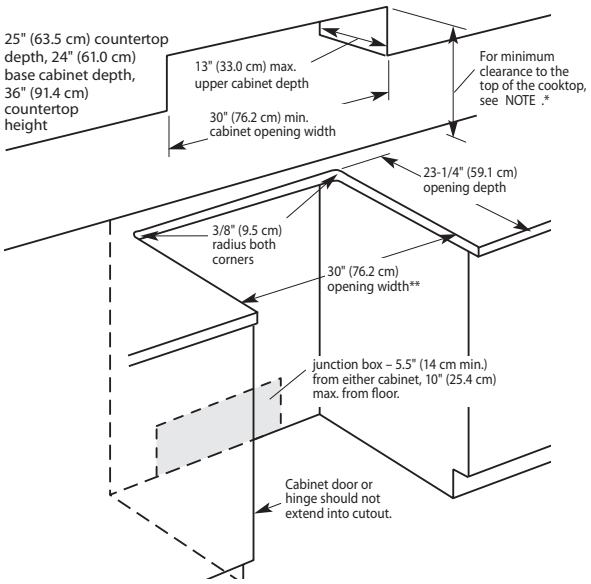
25" (63.5 cm) countertop depth, 24" (61.0 cm) base cabinet depth, 36" (91.4 cm) countertop height
13" (33.0 cm) max. upper cabinet depth
30" (76.2 cm) min. cabinet opening width
For minimum clearance to the top of the cooktop, see NOTE .*
23-1/4" (59.1 cm) opening depth
3/8" (9.5 cm) radius both corners
30" (76.2 cm) opening width**
junction box – 5.5" (14 cm min.) from either cabinet, 10" (25.4 cm) max. from floor.
Cabinet door or hinge should not extend into cutout.

* When installed in a 24" (61 cm) base cabinet with 25" (63.5 cm) countertop, front of oven door protrudes 2 1/2" (6.4 cm) beyond 24" (61 cm) base cabinet.

** Note: 24" (61 cm) minimum when bottom of wood or metal cabinet is protected by not less than ¼" (0.64 cm) flame-retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum, or 0.020" (0.5 mm) copper. 30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.